


## Spannschraube


mit montierten Kontermuttern  
und besonders langem Spannweg  
mit Gabel und Auge  
Tragfähigkeit von 540 kg – 27.220 kg  
verzinkt

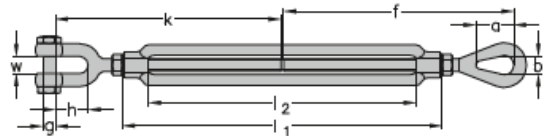

Nenngröße Zoll	l <sub>1</sub> mm	l <sub>2</sub> mm	a mm	b mm	f mm	w mm	h mm	g Zoll	k mm	Tragfähigkeit kg
3/8 x 6	180	152	28	13	137	12	22	5/16	137	540
1/2 x 6	190	152	36	18	153	16	27	3/8	147	1000
1/2 x 9	266	228	36	18	193	16	27	3/8	187	1000
1/2 x 12	342	304	36	18	228	16	27	3/8	222	1000
5/8 x 6	200	152	44	22	177	19	33	1/2	161	1590
5/8 x 9	276	228	44	22	217	19	33	1/2	201	1590
5/8 x 12	352	304	44	22	252	19	33	1/2	236	1590
3/4 x 6	210	152	54	25	196	23	38	5/8	173	2360
3/4 x 9	287	228	54	25	236	23	38	5/8	213	2360
3/4 x 12	362	304	54	25	271	23	38	5/8	248	2360
3/4 x 18	515	457	54	25	351	23	38	5/8	328	2360
7/8 x 12	372	304	60	31	287	28	44	3/4	266	3270
7/8 x 18	524	457	60	31	367	28	44	3/4	346	3270
1 x 12	381	304	76	36	323	30	52	7/8	286	4540
1 x 18	533	457	76	36	403	30	52	7/8	366	4540
1 1/4 x 12	387	304	90	46	360	44	71	1 1/8	330	6890
1 1/4 x 18	540	457	90	46	440	44	71	1 1/8	380	6890
1 1/4 x 24	693	610	90	46	495	44	71	1 1/8	479	6890
1 1/2 x 12	400	304	104	54	390	52	71	1 3/8	360	9710
1 1/2 x 18	550	457	104	54	465	52	71	1 3/8	430	9710

## Spannschraube

mit montierten Kontermuttern  
 und besonders langem Spannweg  
 mit Gabel und Auge  
 Tragfähigkeit von 540 kg – 27.220 kg  
 verzinkt

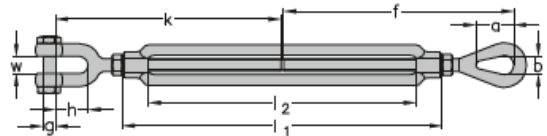

Nenngröße Zoll	l <sub>1</sub> mm	l <sub>2</sub> mm	a mm	b mm	f mm	w mm	h mm	g Zoll	k mm	Tragfähigkeit kg
1 1/2 x 24	703	610	104	54	540	52	71	1 3/8	496	9710
1 3/4 x 18	570	457	117	59	475	60	86	1 3/4	440	12700
1 3/4 x 24	720	610	117	59	577	60	86	1 3/4	500	12700
2 x 24	735	610	143	67	632	64	95	2	540	16780
2 1/2 x 24	800	610	165	79	665	73	113	2 1/2	580	27220