


Spannschraube

mit montierten Kontermuttern
und besonders langem Spannweg
mit Haken und Auge
Tragfähigkeit von 450 kg – 2.270 kg
verzinkt

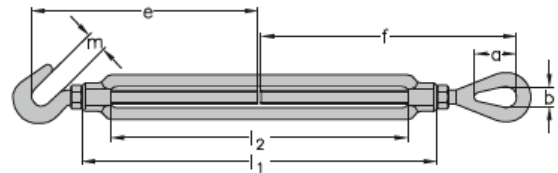

Nenngröße Zoll	l ₁ mm	l ₂ mm	a mm	b mm	f mm	m mm	e mm	Tragfähigkeit kg
3/8 x 6	180	152	28	13	137	12	129	450
1/2 x 6	190	152	36	18	153	15	147	680
1/2 x 9	266	228	36	18	193	15	187	680
1/2 x 12	342	304	36	18	228	15	222	680
5/8 x 6	200	152	44	22	177	20	166	1020
5/8 x 9	276	228	44	22	217	20	206	1020
5/8 x 12	352	304	44	22	252	20	241	1020
3/4 x 6	210	152	54	25	196	23	181	1360
3/4 x 9	287	228	54	25	236	23	221	1360
3/4 x 12	362	304	54	25	271	23	256	1360
3/4 x 18	515	457	54	25	351	23	336	1360
7/8 x 12	372	304	60	31	287	26	273	1810
7/8 x 18	524	457	60	31	367	26	353	1810
1 x 12	381	304	76	36	323	29	286	2270
1 x 18	533	457	76	36	403	29	366	2270